


# ProScene UWC295

All-in-One 295" Direct View LED Display

---

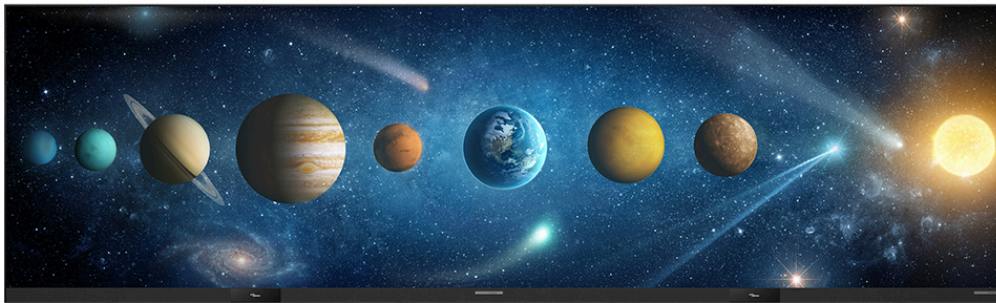

A streamlined, all-in-one 295" Full HD direct view LED display designed for fast setup, brilliant visuals, and long-term durability.

Full HD display with 700 nits brightness

- 15,000:1 contrast ratio, and 3840Hz refresh rate for stunning, smooth large-format visuals
- Flip-Chip COB LED for a seamless surface, improved durability, and energy efficiency
- Quick installation with pre-assembled columns and simple one-cord power setup
- Front-accessible, hot-swappable tiles for fast, hassle-free maintenance
- Built-in Android OS, Optoma Management Suite Cloud (OMSC) and Display Share for smart content and display control
- Powerful 120W built-in sound system for immersive audiovisual performance



# Specification

---

## Product parameters

Screen size	295"
LED type	COB Flip-Chip (chip on board)
Pixel pitch (mm)	1.87
Resolution	3840x1080
Recommended viewing distance	≥ 3.8m
Installation mode	Wall-mount, floor stand
Number of tiles	576
Assembly structure	12 LED columns
LED tile dimension	150 mm x 168.75 mm / 5.9" x 6.64"

---



## Optical parameters

Brightness (max)	500 nits (100~110V), 700 nits (200~240V)
Refresh rate	3840Hz
Gray scale	13 ~ 16 bit
Contrast ratio	15000:1
Color temperature	2300~9300K (Adjustable)
Color gamut	DCI-P3: 92%, Rec. 709: 99%
HDR support	NA
Viewing angle (H x V)	Horizontal 165°, Vertical 165°
Bit depth	13-bit hardware + 6-bit software
LED lifespan (hours to half brightness)	100,000 hours

---

## System parameters

Operating system	Android 13.0
CPU	Four Cortex-A76 + four Cortex-A55, frequency 2.4 GHz
RAM	8 GB LPDDR4
Storage	64 GB

---

## Connectivity

Inputs	3 x HDMI 1.4, 1 x HDMI 2.0 (4K compatible), 1 x USB Type C (5V,1A), 2 x USB 3.0, 1 x Audio In (3.5mm)
Outputs	1 x HDMI, 1 x Audio Out (3.5mm)
Communication ports	1 x RS232 (RJ45), 1 x USB, 1 x LAN (RJ45) (1000M), 1 x RJ45 for service

# Specification

---

## Multimedia support

Image	JPEG/JPG/BMP/GIF/PNG
Audio	MP2/MP3/WAV/FLAC/AAC/M4A
Video	3GP/AVI/FLV/MKV/MOV/MP4/MPG/TS/WEBM

---

## Audio/Sound

Speaker count & Watts per speaker	2 x 30 W (front); 2 x 15 W (left); 2 x 15 W (right)
-----------------------------------	---

---

## Environmental parameters

Operation temperature	-10°C ~ 40°C
Operation humidity	10% ~ 80% RH, no condensation

---

## Power

Input power range	AC 100 ~ 240 V, 50 ~ 60Hz
Standby power	≤0.5 W
Power consumption (average)	641 W x 2 (dual power cord)
Power consumption (max)	2137 W x 2 (dual power cord)

---

## Applicable software

Optoma Management Suite	Yes (OMSC)
Display Share	Yes

---

## Weight and dimensions

Dimensions (overall size) W x H x D	7261.6 mm × 2150.4 mm x 31 mm / 285.88" x 84.66" x 1.22" (51 mm / 2" total mounted depth)
Dimensions (display area) W x H	7200 mm × 2025 mm / 283.46" x 79.72"
Weight (per column/per screen)	16.5 kg / 308 kg (36.38 lbs / 679 lbs) without wall mount brackets

# Specification

---

## Shipping (2 units for Ultra-Wide options)

<b>Dimensions (cabinet, tiles) W x H x D</b>	1550 mm x 1330 mm x 1215 mm / 61.02" x 52.36" x 47.83"
<b>Gross weight (cabinet, tiles)</b>	323 kg / 712.09 lbs
<b>Dimensions (system box, wall mount) W x H x D</b>	2064 mm x 556 mm x 497 mm / 81.26" x 21.88" x 19.56"
<b>Gross weight (system box, wall mount)</b>	71 kg / 156.53 lbs

---

## Certifications

<b>Safety</b>	CB, ETL
<b>EMC</b>	CE, FCC
<b>Environment</b>	RoHS, REACH, WEEE

---

## Warranty & Maintenance

<b>Warranty</b>	By region
<b>Maintenance</b>	Front access

---

## Standard accessories

<b>Spare LED tiles</b>	8 x 2
<b>Wall mount bracket</b>	1 x 2
<b>Front tile puller</b>	1 x 2
<b>System control box maintenance tool</b>	1 x 2
<b>Power cord</b>	4 x 2
<b>Remote control</b>	1 x 2
<b>USB flash drive (user manual, installation guide)</b>	1

---

## Optional accessories

<b>Image processor box</b>	HQScene200
<b>Floor stand</b>	LST02
<b>Wi-Fi module</b>	SI07E