


ZU2100 / ZU1800 / ZU1600

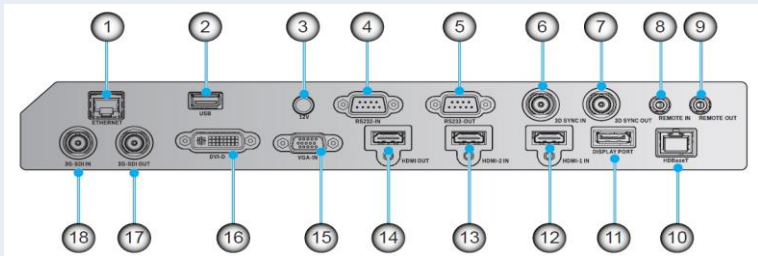

超高亮度雷射旗艦工程投影機

產品名稱	ZU2100	ZU1800	ZU1600																																								
解析度	WUXGA (1,920 x 1,200)																																										
顯示技術	德州儀器DLP技術 0.96" DMD晶片																																										
亮度	21,000 流明	18,000 lm	16,000 lm																																								
對比	2,000,000 : 1																																										
消耗功率	1650W @220V AC (明亮模式)	1400W @110V AC (明亮模式)	1200W @110V AC (明亮模式)																																								
	1900W @220V AC (超明亮模式)	1350W @220V AC (明亮模式)	1150W @220V AC (明亮模式)																																								
光源	雷射光源																																										
光源壽命	高達 30,000 hours (經濟模式)																																										
數位梯形修正	水平 ±20%, 垂直 ±20%																																										
操作溫度	運作中溫度: 0 ~ 50 °C ; 運作濕度: 10~85%(無凝解)																																										
投射方向	天花板, 地板, 前/後, 360度投影																																										
光學鏡頭位移	垂直:+- 60%, 水平: +- 25% (全高, 全寬) 垂直: +-120%, 水平: +- 50% (半高, 半寬)																																										
3D 功能	支援主動式與被動式3D																																										
相機模組	內建嵌入式前置相機模組(支援OSD選單自動對焦/自動色彩均勻度)																																										
投影鏡頭(投射比)	BX-CTA11 (0.65~0.75 : 1) / BX-CTA18 (0.84~1.02 : 1) BX-CTA19 (1.02~1.36 : 1) / BX-CTA20 (1.2~1.5 : 1) BX-CTA21 (1.5~2.0 : 1) / BX-CTA22 (2.0~4.0 : 1) BX-CTA23 (4.0~7.2 : 1) / BX-CTA27 (7.2~10.8 : 1)																																										
投影尺寸	取決於搭配鏡頭 (依據搭配鏡頭不同, 而有不同尺寸)																																										
I/O連接埠	 <table><tr><th>編號</th><th>連接埠</th><th>編號</th><th>項目</th></tr><tr><td>1</td><td>乙太網路</td><td>10</td><td>HDBaseT</td></tr><tr><td>2</td><td>USB Type A (5V,0.5A)</td><td>11</td><td>DisplayPort 1.2a 輸入</td></tr><tr><td>3</td><td>12V 觸發</td><td>12</td><td>HDMI 1輸入(HDMI 2.0b , HDCP2.2)</td></tr><tr><td>4</td><td>RS232 輸入</td><td>13</td><td>HDMI 2輸入(HDMI 2.0b , HDCP2.2)</td></tr><tr><td>5</td><td>RS232 輸出</td><td>14</td><td>HDMI 2.0b 輸出</td></tr><tr><td>6</td><td>3D SYNC 輸入</td><td>15</td><td>VGA 輸入 (D-Sub 15pin)</td></tr><tr><td>7</td><td>3D SYNC 輸出</td><td>16</td><td>DVI-D 輸入</td></tr><tr><td>8</td><td>有線遙控器輸入</td><td>17</td><td>3G SDI 輸出</td></tr><tr><td>9</td><td>有線遙控器輸出</td><td>18</td><td>3G SDI 輸入</td></tr></table>			編號	連接埠	編號	項目	1	乙太網路	10	HDBaseT	2	USB Type A (5V,0.5A)	11	DisplayPort 1.2a 輸入	3	12V 觸發	12	HDMI 1輸入(HDMI 2.0b , HDCP2.2)	4	RS232 輸入	13	HDMI 2輸入(HDMI 2.0b , HDCP2.2)	5	RS232 輸出	14	HDMI 2.0b 輸出	6	3D SYNC 輸入	15	VGA 輸入 (D-Sub 15pin)	7	3D SYNC 輸出	16	DVI-D 輸入	8	有線遙控器輸入	17	3G SDI 輸出	9	有線遙控器輸出	18	3G SDI 輸入
編號	連接埠	編號	項目																																								
1	乙太網路	10	HDBaseT																																								
2	USB Type A (5V,0.5A)	11	DisplayPort 1.2a 輸入																																								
3	12V 觸發	12	HDMI 1輸入(HDMI 2.0b , HDCP2.2)																																								
4	RS232 輸入	13	HDMI 2輸入(HDMI 2.0b , HDCP2.2)																																								
5	RS232 輸出	14	HDMI 2.0b 輸出																																								
6	3D SYNC 輸入	15	VGA 輸入 (D-Sub 15pin)																																								
7	3D SYNC 輸出	16	DVI-D 輸入																																								
8	有線遙控器輸入	17	3G SDI 輸出																																								
9	有線遙控器輸出	18	3G SDI 輸入																																								
噪音值(經濟模式)	40 dB	36 dB	36 dB																																								
重量	54 公斤	50公斤	50 公斤																																								
尺寸 (WxDxH)	650(寬) x 682(深) x 300.9(高) mm (單機不含鏡頭, 含調整腳座高度) 650(寬) x 682(深) x 250.9(高) mm (單機不含鏡頭, 不含調整腳座高度)																																										