optoma.fr

WL10C Sensor Box

Boîtier détecteur multifonctions pour les écrans numériques interactifs
Série 5

- **Lecteur NFC - Authentification sécurisée et expérience utilisateur simplifiée**
- **Détecteur d’humidité - Surveillez l’humidité de l’air dans la salle entre 30 et 80%**
- **Economies d’énergies avec le détecteur de mouvement infrarouge PIR - L’écran numérique interactif passe en mode veille si aucun mouvement n’est détecté**
- **Le capteur environnemental détecte des éléments de votre environnement - Surveillez la qualité de l’air : niveau de CO2 et les particules fines**

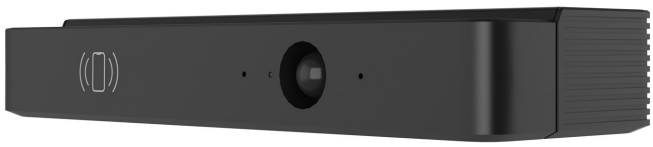

Le détecteur capte la température, l’humidité et les particules nocives comme les moisissures et les champignons. Il est également doté d’un détecteur de mouvement PIR et d’un lecteur NFC pour une authentification sécurisée par carte.

Specifications

UPC: 796435 09 189 7, EAN: 5055387668027, Colour: Black

Général	
Dimensions (LxPxH)	206 x 31.7 x 69mm
Alimentation	5v. 0.5A
Poids net	0.18 kg
Poids brut	0.39 kg

Copyright © 2024, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners.Errors and omissions excepted, all specifications are subject to change without notice.All images are for representation purposes only and may be simulated. 04112024122030